


S0541 - 2 2 0-5V

S0541

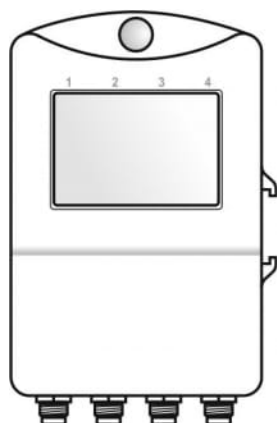

USB RS232 GSM
EN ISO/IEC 17025

USB LAN COM

Table

Temperature range	-30 to +70°C
Accuracy	$\pm 0.2^{\circ}\text{C}$ -50 to +100°C $\pm 0.2\%$ +100 to +260°C $\pm 0.4\%$ -90 to -50°C
Resolution	0.1°C
0-5Vdc	$\pm 0.2\%$ FS
Power	Power supply
Power	10024
Power	10
Power	32000
Power	Power - Power - Power
Power	93x64x29mm
Power	Power 3,6V, size AA
Typical battery life	5
Power 1	Power 70%
Power 10	1
IP	IP67 - Power
Power	130g
Power	3